

Silent Messenger IV

PRODUCT GUIDE

Message Board | Small-Sized

This “Silent Messenger IV” is a small-sized message board, sized right for residential areas, for city or county roads, or anywhere that a smaller footprint is preferred. Available in 3 panels sizes and a variety of matrices, this message board is powered by a combination of solar panels and batteries.

Radar can be easily added to communicate a simple message plus vehicle speed to calm traffic.

OPTIONAL REMOTE COMMUNICATIONS & GPS TRACKING

Looking to communicate with your Message Board remotely? With this option, the unit comes with a GPS receiver, cellular transceiver, and **FREE lifetime cellular service***.

SolarTech’s Command Center software, which allows you to track your equipment using the built-in cellular transceiver and GPS system.

Manage your fleet from your laptop, PC, or smartphone... without leaving your desk! Access units from a map or list.

Control units individually or broadcast to a group. You can build a message library, share messages between boards, schedule messages and more.

Get automatic email notifications when a message changes, if the battery voltage is low, if a pixel fails, or the unit moves.




EASY-TO-USE CONTROLLER

The touch-screen controller needs no manual - it's that easy to use! Includes:

- » Password protection
- » Intuitive icons for ease of use
- » Scheduling capability
- » Fully networkable
- » NTCIP version 3 compatible

Panel Sizes

- 60" wide x 30" high
- 78" wide x 30" high
- 78" wide x 33" high

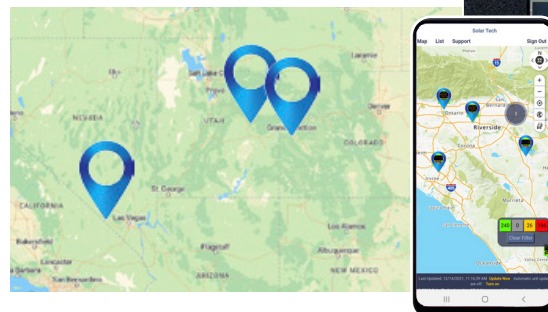

No more misplaced equipment... fewer problems... less downtime!

Learn more at www.solartech.com



Silent Messenger IV

Message Board | Small-Sized

Display Panel

Panel Size	60" wide x 30" high (152 cm x 76 cm)
	78" wide x 30" high (198 cm x 76 cm)
	78" wide x 33" high (198 cm x 84 cm)
Panel Construction.....	All aluminum, modular construction
Pixel Size	1.5" x 1.5" (38 mm x 38 mm)
	0.75" x 0.75" (19 mm x 19 mm)
Number of Fonts	Twelve (12)
Character Height	7.5" to 24" (19 cm to 76 cm) - 38 mm
	3.75" to 24" (10 cm to 76 cm) - 19 mm
Graphics Capability.....	Full matrix with animation
Display Technology	LED (amber, 592 nm)
Display Life Expectancy.....	10 years typical
Lifting Mechanism.....	1,000 lb. capacity winch & cable
Viewing Angle.....	>60°
Sign Panel Height (Operating).....	7 feet (214 cm) to bottom of sign panel

Trailer

Length Overall	117" (298 cm) - towing / 75" (191 cm) - deployed/stored
Width Overall	60" (152 cm) or 78" (198 cm)
Height Traveling.....	90" (229 cm)
Height Operating	129" (328 cm)
Ground Clearance	13" (33 cm)
Weight	1,200 lbs. (544 kg) approx. (maximum)
Coupler (Class III)	2" (50 mm) ball or 2-1/2" (64 mm) pintle ring
Axle/Suspension	Torq-Flex - independent

MegaTech Control Console

Console Circuitry	Ultra-low power solid state
Console Touchscreen.....	Weather-resistant, backlit, full-color GUI, intuitive icon-driven, multi-lingual: five international languages
Programming Software	Proprietary, field upgradable (for units not connected to Command Center)
Message Capacity.....	Pre-programmed and user programmed > 250 each
Time-Date Control.....	Real-time clock/calendar (365)
Message Display Time.....	User-selectable (0.1 to 99 seconds)
Display Update Time.....	Instantaneous
Non-volatile Memory.....	16 GB Micro SD card
Password Protection.....	User selectable, multi-level
Operator Interface.....	Easy-to-use icons (no manual required)
Connectivity.....	Networkable (wired or wireless) and NTCIP compatible (Ethernet & RS-232)

Energy Source

Operating Voltage.....	12 volts DC (nominal)
Battery Type.....	6 volt heavy duty, deep cycle (GC-2)
Number of Batteries.....	Four (4) standard lead acid (flooded)
Battery Bank Capacity.....	520 amp hours
Battery Status Indicator	Displays full-charge, normal and, low battery condition
Solar Array Construction	Top-mounted solar panels in aluminum frame
Solar Array Power Output.....	Standard 160 watt (nominal)
Solar Charge Controller.....	Automatic, temperature compensated, MPPT (Maximum Power Point Tracking)



OPTIONS AND UPGRADES

Remote Communications

Includes GPS receiver, cellular transceiver, and FREE cellular service.*
Remotely access and track your Message Board.

**With this option, cellular service is provided free of charge, and is limited to carrier supported generational wireless technology.*

Solar Array Options

» 220 watt » 270 watt » 330 watt

Battery Upgrades

Gel Cell or AGM (maintenance-free)
Four (4), 520 amp hour

Battery Charger Upgrades

» 45 amp, 120 volt AC
» 55 amp, 120 volt AC

Radar Options

Directional doppler K-Band, user-
configured KPH or MPH
Data collection and statistical
analysis package included.

Battery Security Options

» Anti-theft steel battery frame
bolted to trailer
» Vandal-proof battery box with
reinforced steel cage



SCAN ME

Custom
Colors
Available

Learn more at www.solartechology.com

